


Lake Rectangular Dining Table



DESIGNED IN 2013

ASSEMBLY NOTES | REV 01

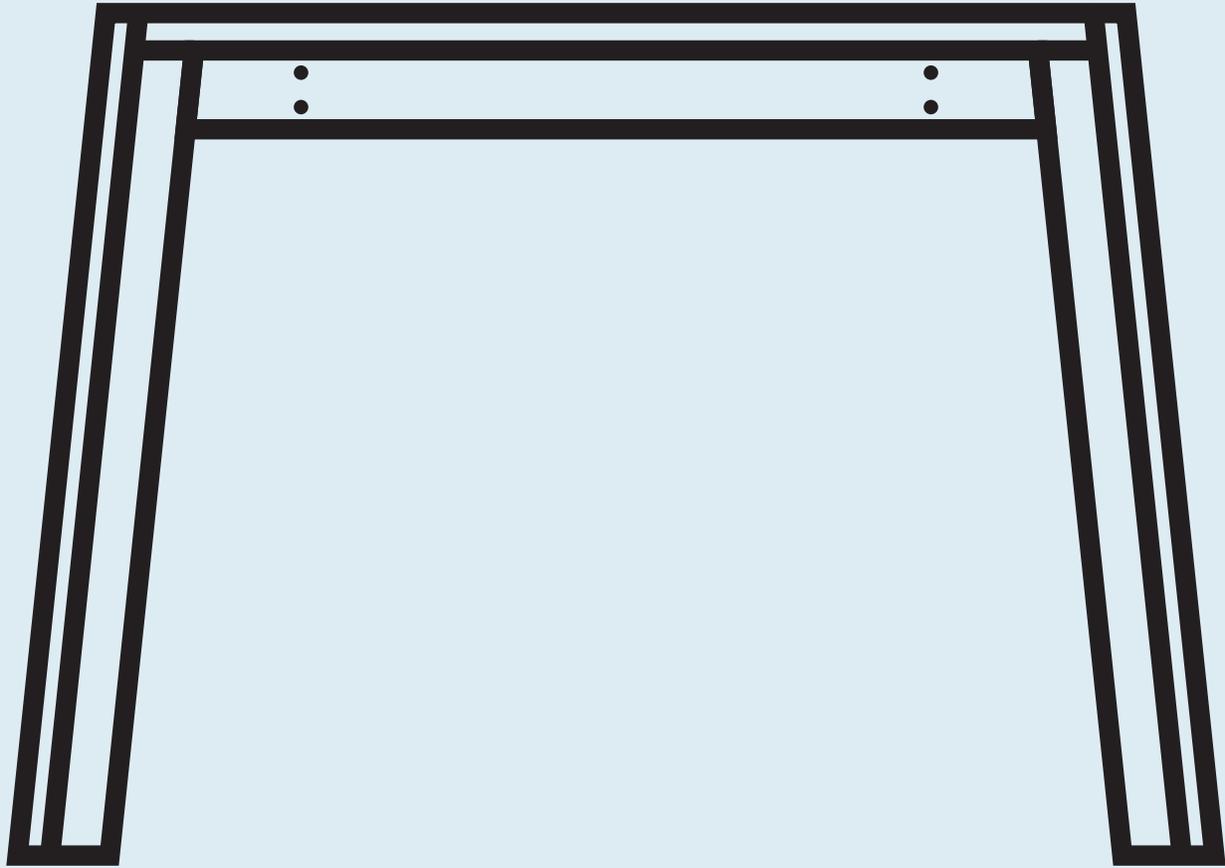

DIVE IN.

Glass floats on a solid wood frame resulting in a seductive combination fit for the boardroom, feasts of molecular gastronomy, or Sunday night hotdish.

NEED A HAND?


Contact us at service@bludot.com or **844.425.8368** for assistance.

Parts & Hardware




QTY 4

Pt. 5005




QTY 8

Pt. 3001



QTY 8

Pt. 3007



QTY 8

Pt. 8023



QTY 4

Pt. 8022




QTY 8

Pt. 1062




QTY 1

Pt. 9015




QTY 8*

Pt. 4021

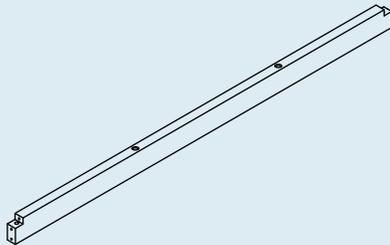


QTY 2

Stretcher Rail*



QTY 2

Leg Frame

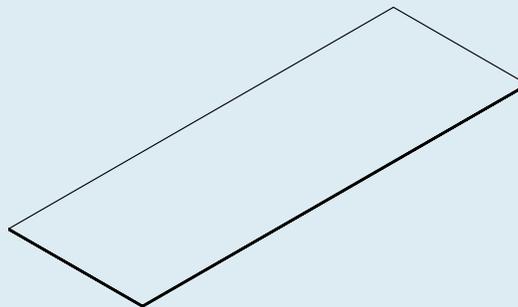

QTY 1



Glass Top

*The stretcher rails have varying quantities of bumper locations depending on table length.


Step 01

ASSEMBLE LEG FRAMES AND STRETCHER RAILS.

Assemble components upside down as shown. Insert cylindrical dowel nuts into stretcher rails with the slotted end facing outwards and attach to leg frames using hardware as shown. Install magnetic brass covers over bolt heads once bolts have been tightened.

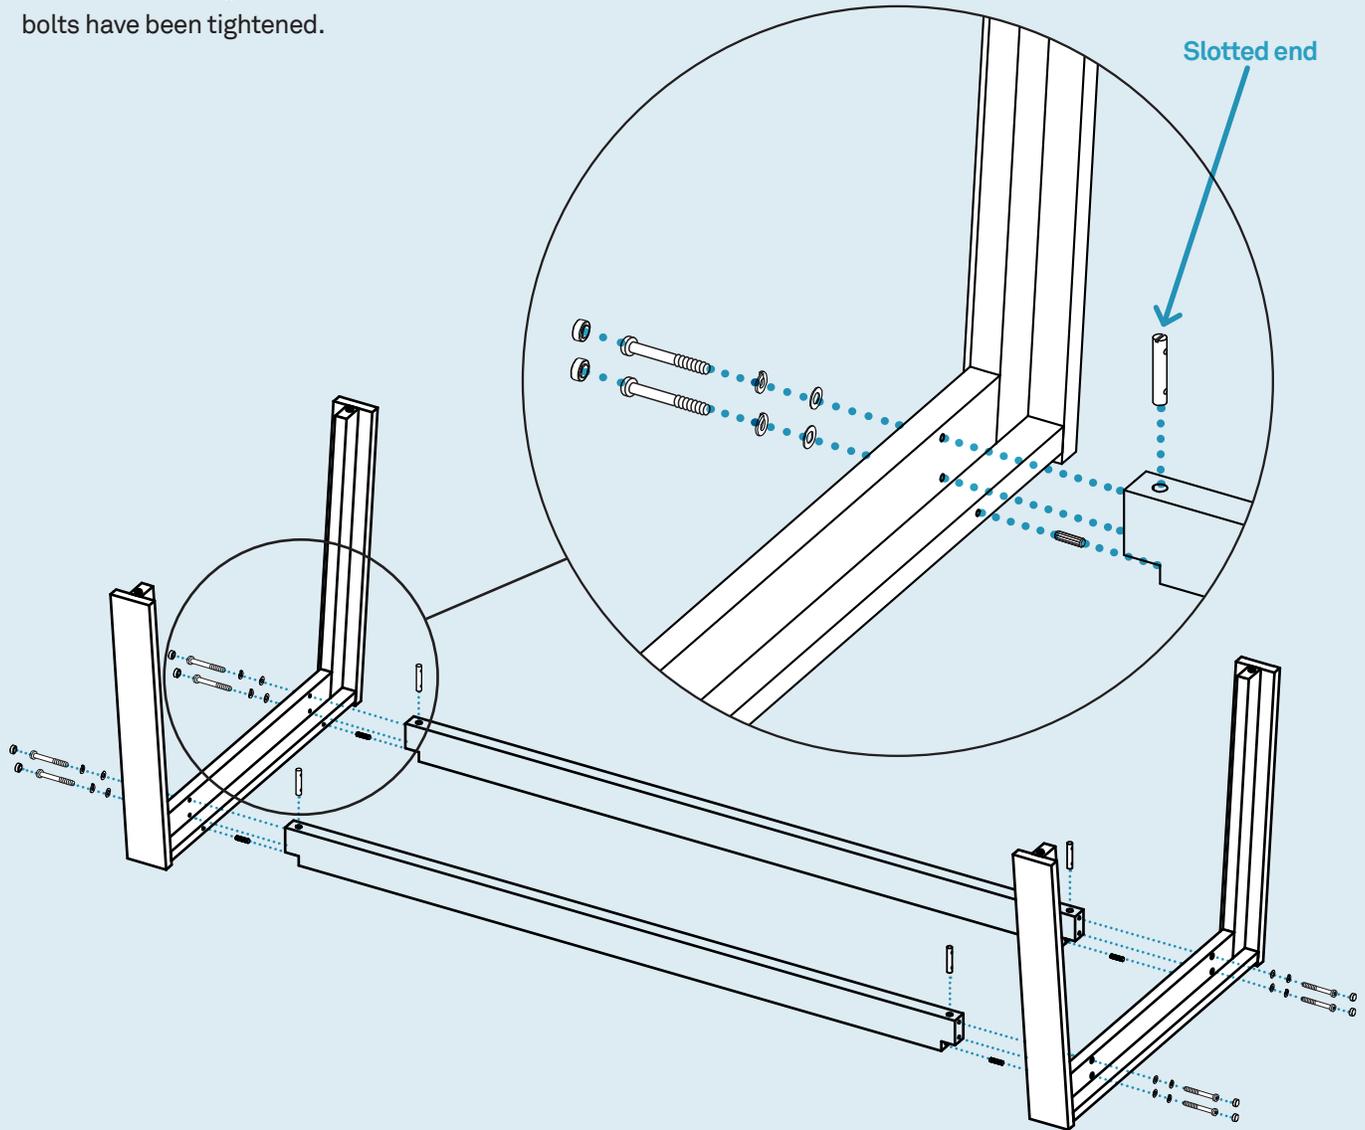

PT. 5005 X 4



PT. 8022 X 4



PT. 1062 X 8



PT. 3001 X 8



PT. 3007 X 8



PT. 9015 X 1



PT. 8023 X 8


Step 02

INSTALL GLASS TOP.

Caution: Two or more people are required to safely complete the following steps.

Carefully flip the frame over to the correct orientation. Place bumpers in the recessed slots as shown. Adjust the leg levelers, ensuring that they contact the floor before gently lowering the glass top onto the frame.

*The stretcher rails have varying quantities of bumper locations depending on table length.

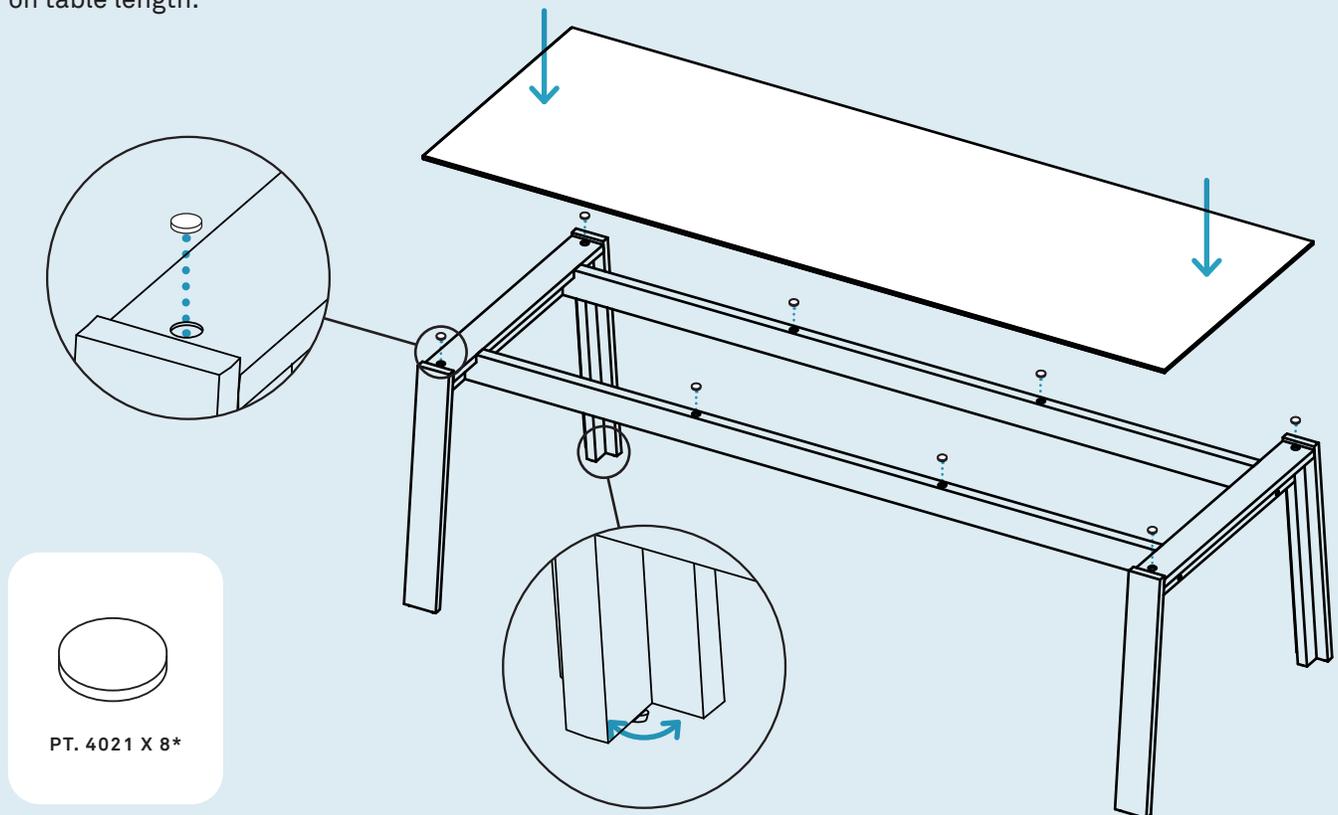

Additional Information

GLASS

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated for glass surfaces. Do not use abrasive cleaners.

WOOD

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated for wood furniture. Wipe completely dry with a soft cloth in the direction of the wood grain.

